

UnQondo-Fomtec Monitor Trolley

UnQondo FOMTEC Monitor Trolley is designed to deliver Volumes of water or foam on to any Risk from a distance. The design allows for easy access to restricted areas where Fire Appliance cannot. The unit is also very stable when used at the maximum Operating pressure. A "T" Handle type Draw bar is fitted for easy manoeuvrability.

Unqondo – Fomtec – **Hydro-Flow** stainless steel Monitor is fitted to the Trolley. The Monitor can be fitted with either Water Nozzle or Foam Cannon. Either option can be fitted with Self Inducing Valve. A dedicated supply of Foam Concentrate must be provided. Foam concentrate induction rate can be adjusted from 0 up to 6 % Strength, depending on the risk.

Typical Applications


Hydro-flo can be used in the following Applications:-

- Truck / Rail Loading gantry
- Tank Cooling operations
- Tank Top Foam Pouring Applications
- Pump Bay Protection
- Structural Cooling
- Any application where Long Range water / foam delivery is required

Specification & Performance

Flow	3000 Litres / Min - MAX
Work Pressure	10 Bar - Max
Test Pressure	20 Bar
Materials	Trolley – Mild Steel
Jacks	4 each Stabilizing Jacks fitted
Monitor Elevation when fitted to Trolley	+ 90 Degrees to – 20 Degrees
Traverse	360 Degrees , continuous
Inlet	2 x 65 mm BIC Male with valves
Outlet	Flanged 100 mm ASA 150
Finish	Prime Coated and Painted one Coat Red Enamel
Hose Racks	2 x Fitted for Flaked hose – 30m x 65 mm
Dimensions	L 1100 x W 980 x H 1100 [Excluding Monitor]

Unqondo Fomtec Monitor Trolley

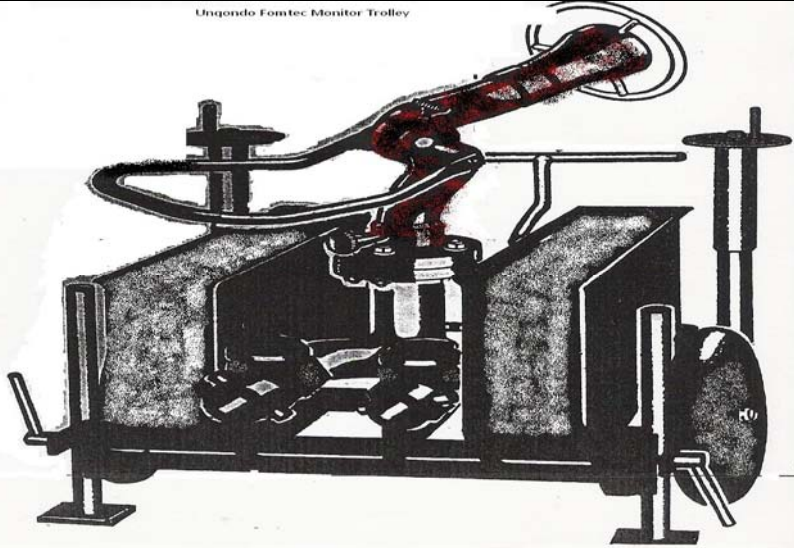

Hydro-flo Fixed Hand Controlled Monitor

Data Sheet	Monitor Trolley
Ref	Monitor Trolley 04/2009-Rev 0
UnQondo Projects – Fire Protection Specialists ** Fomtec–Sweden-Fire Fighting Foams & Hardware	
Tel + 27 11 795 1688 / 795 1899	Cranberry Street - Laser Park – Honeydew- Gauteng. S Africa
Fax + 27 11 795 1799	** Email : admin@unqondo.co.za